


# Microvideo

---

## Rack Mounting Remote Panel : REM-8

Many Microvideo products can be set up and controlled remotely. A range of control panels are available to suit different requirements. For applications where a single remote panel is required to control a number of devices we can offer the REM-8. This is similar to our standard rack mounting control panel but has an additional eight buttons, allowing quick selection of each particular device.

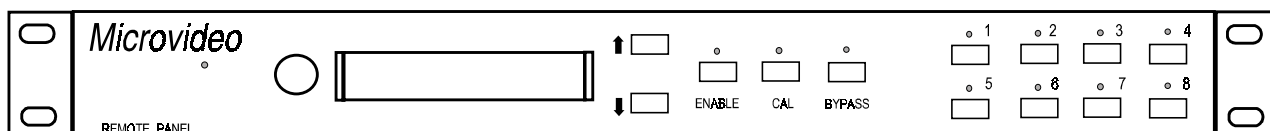

### Control:

The current function of the Remote Panel is indicated on the LCD display.

The up and down arrow buttons rotate through the functions.

For each function the rotary control, to the left of the LCD, sets the value of the parameters.

The CAL button resets this parameter to the default value.

The ENABLE button disables the push button controls .

BYPASS puts the unit being controlled into bypass mode.

The eight device selection buttons allow the user to immediately control a particular device.

The parameters for each device are held separately

**Connections:** RS232 or RS422, both on 9 way D type (socket).

**Physical :** Standard 1U rack mounting, Width = 440mm, Height = 44mm, Depth = 200m

**Power :** IEC input for 240V AC (220v) or 110VAC set by internal links.  
Consumption - 15W

**Part No :** REM - 8 Rack Mounting, 8 button remote.

### Notes :

The typical application is for controlling a number of Microvideo Series 200 digital interface cards, that may be mounted in the same rack frame (1U or 3U). The rack frame must have a CPU card in order to communicate with this remote panel. The following cards from the Series 200 range may be controlled -

KEY200	Digital Video Mixer - Keyer	PRC200	Digital Video Processing Amp
AMX202	Digital Audio Mixer	AMX203	Digital Audio processor

The user must specify which products are being controlled at time of ordering.