



## Digital Videocassette Recorder

As digital videocassette recorders evolve, they give users more tools to get the job done quickly and properly. The DSR-45P is a versatile DVCAM digital video recorder that is perhaps the best in its class.

### The Versatile DVCAM Recorder for Professional Editing

Place the DSR-45P in a small to medium sized production house to create an ideal system for both nonlinear editing and linear A/B roll-editing as a source feeder\*. Whether editing weddings, corporate training videos or cable television programmes, the DSR-45P gets the job done in a timely manner with professional results. Its i.LINK™\*\* interface allows seamless integration into compatible DV-based editing suites. In addition, analogue component connectors allow the unit to accept and transfer high-quality video and audio. For external control, the DSR-45P comes standard with RS-422A and RS-232C interfaces. Equipped with a 2-inch\*\*\* built-in LCD, the DSR-45P displays information including; audio level, system status and the working image as they are needed. The DSR-45P is the videocassette recorder of choice for small to medium-sized production houses.

- \* The DSR-45P is best used as a player/recorder in a nonlinear editing suite. When used in A/B roll-editing, the DSR-45P can be used as a source feeder. The DSR-45P cannot perform insert or assemble editing nor does it have a synchronisation capability.
- \*\* i.LINK is a Sony trademark used only to designate that a product is equipped with an IEEE 1394 connector. All products with an i.LINK connector may not communicate with each other. Please refer to the documentation that comes with any device having an i.LINK connector for information on compatibility, operating conditions and proper connection.
- \*\*\* Viewable area measured diagonally.

### DVCAM Format for Excellent Picture And Sound Quality

#### The DVCAM Format

The DSR-45P uses the DVCAM format, the professional extension of the worldwide standard DV format. The DVCAM format uses 8-bit digital component recording with a 5:1 compression ratio and a sampling rate of 4:2:0. The unique compression algorithm provides excellent picture quality and superb multi-generation dubbing performance.

#### Up to Four Independent, High-quality, Audio Channels

The DSR-45P provides two selectable audio channel modes; a two-channel mode with 48 kHz/16-bit recording and a four-channel mode with 32 kHz/12-bit recording. Thanks to its PCM (Pulse Code Modulation) digital stereo recording system, the DSR-45P offers superb digital audio performance with a wide dynamic range and an excellent signal-to-noise ratio, comparable to CD-quality audio.

### Playback Compatibility with the DV (25 Mb/s) Format

The DVCAM format maintains playback compatibility with the consumer DV format\*. This compatibility allows the user to play back DV recorded tapes on the DSR-45P. Such versatility is quite advantageous to users working with DV cameras for their great portability and long recording times.

\* In SP mode only.

### Dual-size Cassette Mechanism

The DSR-45P has a dual-size cassette mechanism, which accepts both mini and standard size DVCAM and DV cassette tapes without any special adaptor. This innovative feature allows the four different types of cassette tapes to be used without the cumbersome process associated with additional mechanical hardware.

### Long-duration Recording Capability

DVCAM videocassette tapes come in two sizes: standard and mini. A maximum recording time of 184-minutes is possible with a standard size cassette (PDV-184ME), while the mini cassette (PDVM-40ME) allows up to 40-minutes. Although the tape is relatively narrow, 1/4-inch (6.35 mm) and the cassette compact, these long recording times are achieved by using Sony advanced ME (Metal Evaporated) tape.

### Capability of Recording in DV Format\*

Should you require a longer recording time than what is available with the DVCAM format, the DSR-45P is capable of recording in the DV format. In this format, a standard-sized cassette records up to 270 minutes.

\* When recording in DV (SP) format, transitions from cut to cut may not be smooth. In addition, when the recording format is switched between DVCAM and DV, the transition may not be recorded smoothly. This is a normal and expected phenomenon.



# DSR-45P Digital Videocassette Recorder



## Versatile Video and Audio Interfaces

### i.LINK Interface

The DSR-45P is equipped with a 4-pin i.LINK (DV) interface based on the IEEE 1394 standard. The i.LINK interface provides a digital link from the DSR-45P to a variety of compatible equipment including Sony DVCAM VTRs and third-party nonlinear editors. Signals including video, audio, time code and control can be transferred through this I/O with virtually no degradation of image or sound quality. In addition, when the DVCAM cassette with IC memory is loaded into a DSR-45P, the ClipLink™ data recorded on the cassette memory can be uploaded to a nonlinear editing system\*.

\* Although the DSR-45P can send ClipLink data via i.LINK, ClipLink data cannot be modified by the DSR-45P.

### Analogue Component Input/Output and S-Video

The DSR-45P provides a full range of analogue video inputs and outputs; component, composite, and S-Video inputs and outputs are all available. The DSR-45P can also be used as a signal converter. Component, composite, and S-Video analogue signals can easily be converted to and from i.LINK digital signals.

### 4-channel Separate Audio Inputs/Outputs

The DSR-45P has four, independently selectable, audio inputs and outputs. Four XLR connectors carry analogue audio outputs, making the DSR-45P easy to integrate into current analogue-based systems.

### REF Input

The DSR-45P has an external reference input for synchronised playback with other VTRs\*. This is essential when a DSR-45P is one of a number of playback sources in an editing system.

\* The reference input and the composite input share the same connector.

### Time Code Input/Output

The DSR-45P is equipped with a time code input/output capability, enabling time code synchronisation with external equipment, which is ideal for dubbing purposes. The unit can output time code read from the tape when played back at normal speed, and can also receive a time code signal from an external source.

## Simple Editing Control

### RS-422A Interface

Equipped with an RS-422A interface, the DSR-45P can perform as a source feeder in a professional A/B roll-editing system\*. The system can be controlled from a number of different Sony edit controllers, including the FXE Series, PVE-500, RM-450, and the BVE Series\*\*. It is also possible to add the DSR-45P to a current analogue editing system. For example, in an A/B roll-editing system where DV or DVCAM recorded tapes are being used as source material, an S-VHS feeder could be replaced by a DSR-45P.

\* The DSR-45P is best used as a player/recorder in a nonlinear editing suite. When used in A/B roll-editing, the DSR-45P can be used as a source feeder. The DSR-45P cannot perform insert or assemble editing nor does it have a synchronisation capability.

\*\* Excluding the BVE-800.

### RS-422A Interface

The DSR-45P is equipped with an RS-232C control interface allowing basic VTR functions to be controlled from a PC.

## Versatile Recording and Playback Functions


### Effortless Duplication

The DSR-45P has three duplication modes, which can be set from the menu to copy videocassette tapes. In all modes, the original time codes are maintained. The different modes are as follows:

- **AUTO TAPE COPY WITH CASSETTE MEMORY COPY**  
This mode is used to create an exact duplicate of the original tape without blank segments. Both the material on the original tape and the information on the IC memory of the original tape are duplicated.
- **AUTO TAPE COPY**  
This mode is used for duplication of the original tape material without blank segments. The information on the IC memory is not duplicated.
- **MANUAL TAPE COPY**  
This mode is used to copy the original tape from any position on the tape. The information on the IC memory is not duplicated.

These functions are ideal when making work tapes and preserving an original master tape.

## DVCAM Format

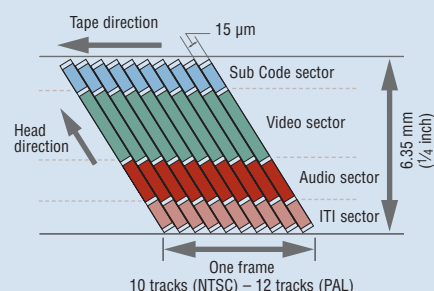

ITI: Insert and Track Information



### Auto Repeat Function

The DSR-45P has an Auto Repeat function that enables it to repeatedly play back a programme. Just after the end of the tape is reached, or the first complete blank portion or the first index point is detected, the tape is automatically rewound and playback of the segment is repeated\*.

\* The DSR-45P ignores any blank or index point in the first 20 seconds of the tape.

### Power-on Recording/Playback Capabilities

An external timer can be used to trigger the DSR-45P to record or play back. When the TIMER switch on the front panel is set to REC, the DSR-45P automatically starts recording as soon as the AC power is turned on. Likewise, when the TIMER switch is set to REPEAT, the DSR-45P goes into the Auto Repeat mode and starts playing back a programme the moment that power is turned on. These convenient features enable unattended automatic VTR operation.

### User Friendly Features

#### Built-in LCD Front Panel Monitor

The DSR-45P is equipped with a 2-inch\* high-resolution colour LCD monitor. Easy set-up is an advantage of this monitor, as the set-up menu clearly displays the appropriate parameters to select. While editing, working images are displayed, audio level meters are available and the system status can be displayed to simplify the editing process.

\* Viewable area measured diagonally.

#### Compact Size and Lightweight

The DSR-45P is both compact and lightweight. Two units can be mounted side-by-side in a 19-inch equipment rack, where they occupy just two units of rack height\*. The DSR-45P weighs only 4.6 kg (10 lb 2 oz).

\* Third party rack-mount kits are available.

#### Cassette Memory Search

The DSR-45P has a cassette memory search function. Searchable index points are marked at the start of every recording.

The DSR-45P can also search for the photo data recorded on cassettes by DSR-250, DSR-PD150 or DSR-PD100A camcorders, or the point where the recording date has been changed. These operations are controlled from the supplied wireless remote controller, RMT-DS5, or an optional DSRM-20 Remote Control Unit.

#### Colour Bar Generator and Tape Counter

The DSR-45P has a colour bar generator that can be activated from the set-up menu\*. In addition, the system comes with a digital tape counter on the front panel, which is convenient for performing relative time code data editing, and for monitoring the operation of the unit.

\* These colour bars are not compatible with the SMPTE standard.

#### Wireless Remote Controller

The Wireless Remote Controller, RMT-DS5, supplied with the DSR-45P, can be used for control of basic functions.

### Rear panel



### High-resolution colour LCD monitor



# DSR-45P Specifications

## General

Power requirements	AC 100 V to 240 V, 50/60 Hz
Power consumption	22 W
Operating temperature	5 °C to 40 °C (41 °F to 104 °F)
Storage temperature	-20 °C to 60 °C (-4 °F to 140 °F)
Mass	4.6 kg (10 lb 2 oz)
Dimensions (W x H x D)	212 x 98 x 392.8 mm (8 3/8 x 3 7/8 x 15 1/2 inches) (including external projections)
Tape speed	28.2 mm/s (DVCAM mode), Approx. 18.8 mm/s (DV SP mode)
Recording/Playback time	184 minutes (DVCAM mode), 270 minutes (DV SP mode), with PDV-184ME cassette, 40 minutes (DVCAM mode), 60 minutes (DV SP mode), with PDVM-40ME cassette
Fast forward/Rewind time	Less than 2 min. with PDV-184ME/184N/184MEM
Search speed (Using supplied RMT-DS5 or optional DSRM-20)	± x1/10, x1/3, x1.x2,x11, x17 (DVCAM) ± x1/10, x1/3, x1.x2,x11, x24 (DV SP)

## VIDEO

Video system	625/50 (PAL)
Rec mode	DVCAM/DV (SP mode only)
Playback mode	DVCAM/DV (SP mode only)

## AUDIO

Rec mode	2CH mode (48 kHz/16-bit) / 4CH mode (32 kHz/12-bit) / automatic (DV IN)
Playback mode (automatically selected)	2CH mode (48 kHz/16-bit) 4CH mode (32 kHz/12-bit) 2CH mode (32 kHz/16-bit) 2CH mode (44.1 kHz/16-bit)

## Input Signals

### VIDEO (ANALOGUE)

Composite	Composite BNC (x1) (Shared with Reference IN) 1.0 Vp-p, 75 Ω, sync negative
Component	BNC (x3) Y: 1.0 Vp-p, 75 Ω, sync negative R-Y: 0.7 Vp-p, 75 Ω(100%) B-Y: 0.7 Vp-p, 75 Ω(100%)

S-Video	DIN 4-pin (x1) Y: 1.0 Vp-p, 75 Ω, sync negative C: 0.3 Vp-p, (subcarrier burst) 75 Ω
<b>AUDIO (ANALOGUE)</b>	
Audio	PIN jack (x4) -10/-2/+4 dBu (full bit -18dB) BNC (x1), 0.5 to 18 Vp-p / 0.5 to 4 Vp-p (with loop-through)
TIME CODE	BNC (x1), 0.5 to 18 Vp-p / 0.5 to 4 Vp-p (with loop-through)

## Output Signals

### VIDEO (ANALOGUE)

Composite	BNC (x1), 1.0 Vp-p, 75 Ω, sync negative
Component	BNC (x3) Y: 1.0 Vp-p, 75 Ω, sync negative R-Y: 0.7 Vp-p, 75 Ω (100%) B-Y: 0.7 Vp-p, 75 Ω (100%) DIN 4-pin (x1) Y: 1.0 Vp-p, 75 Ω, sync negative C: 0.3 Vp-p, (subcarrier burst) 75 Ω RCA pin (x1), 1.0 Vp-p, 75 Ω, sync negative
S-Video	
Monitor	
<b>AUDIO (ANALOGUE)</b>	
Audio	XLR 3-pin male (x4), +4 dBu
Monitor	RCA pin (x1) monaural
Headphone	Stereo mini jack (x1)
TIME CODE	BNC (x1), 2.2 Vp-p 600 Ω / 1.2 Vp-p 75 Ω

## Digital Input/Output Signals

i.LINK (DV In/Out) IEEE 1394 based ( 4-pin x1)

## Others

Colour LCD monitor	2-inch type, 123,200 dots
RS-232C	D-sub 9-pin, male (x1)
RS-422A	D-sub 9-pin, female (x1)
LANC	Stereo mini-mini jack (x1)
Control S	Stereo mini jack (IN x1)

## Supplied Accessories

AC power cord, Wireless Remote Commander RMT-DS5, AA Dry Batteries x2, Operating manual, Interface manual for programmers (RS-232C), Cleaning Cassette

## DVCAM Silver Support Pack

**Silver Support**

The DVCAM line is backed by the Sony professional service infrastructure. Professional customers need professional service and support. As a result, Sony offers you an enhanced support services for DVCAM products. DVCAM products are supplied as standard with a two year Silver Support Pack, in addition to warranty, as standard. This means unique extra services for twice as long including:

- **2 YEARS SUPPORT**  
Silver Support extends the support period given in Standard Warranty from 1 to 2 years.
- **OPERATIONAL HELPDESK**  
The helpdesk provides operational advice so that you can get the most out of your DVCAM equipment and maximise its performance.
- **REPAIR WITHIN 7 DAYS**  
Sony will collect, repair and return the unit to your preferred location within 7 working days.
- **LOAN**  
If the repair is likely to exceed 7 working days, Sony will provide a loan unit for the remaining duration of the repair.
- **COLLECTION ANYWHERE**  
Sony will arrange collection of the faulty unit directly from and deliver directly to your location – anywhere in mainland EU, Norway or Switzerland.

## Optional Accessories

**VMC-IL4408/4415/4435**  
i.LINK Cable  
(4-pin to 4-pin)



**VMC-IL4615/4635**  
i.LINK Cable  
(4-pin to 6-pin)



**DSRM-20**  
Remote Control Unit



© 2004 Sony Corporation. All rights reserved. Reproduction in whole or in part without permission is prohibited. Features and specifications are subject to change without notice. All non-metric weights and measures are approximate. Sony, DVCAM and i.LINK are trademarks of Sony Corporation. CA DSR-45P/GB- / /2004

# SONY

SONY EUROPE

www.sonybiz.net