


KROMA TELECOM

CE6000 – Interface for line-combining

This interface adds up to six 4-wire external audio sources into one output, so it saves ports in the matrix. Very useful for CCUs (cameramen). With a power led.

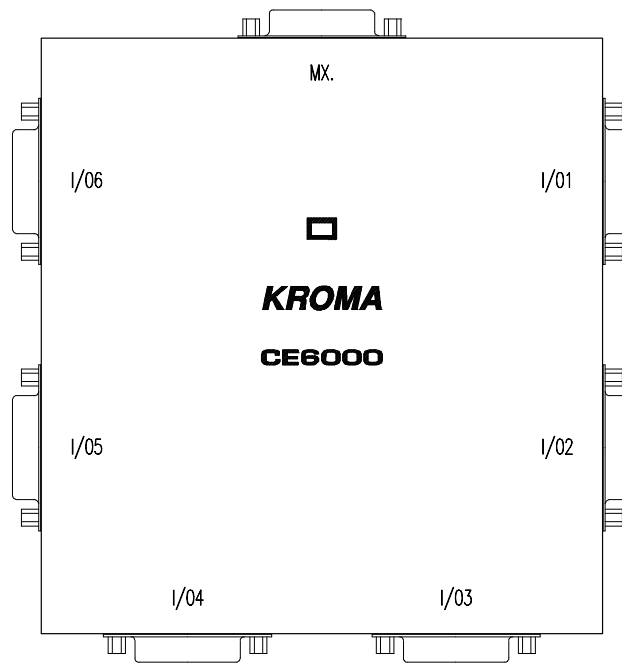

PIN	CE 6000 SUBD 15 FEMALE
1	AUDIO OUT TO MATRIX +
3, 4	GROUND
12	AUDIO IN FROM MATRIX +
2	AUDIO OUT TO MATRIX. -
11	AUDIO IN FROM MATRIX. -
6	-V
5	+V

PIN	CE6000 SUBD 15 MALE
1	AUDIO IN FROM CCUs +
3, 4	GROUND
12	AUDIO OUT TO CCUs +
2	AUDIO IN FROM CCUs -
11	AUDIO OUT TO CCUs -
6	-V
5	+V

KROMA TELECOM

La Granja 80 – Pol Ind Alcobendas
28108 MADRID – SPAIN

Tel +34.91.661.4514 Fax +34.91.661.5875 Email sales@kromatelecom.com

www.kromatelecom.com