



Klystron Power Amplifiers High Efficiency Series C-Band



- Multi-Stage Depressed Collector Klystron
- Compact 1/2 Cabinet Height
- Large Touch Screen Graphical Display
- Parameter Trend Recording
- Power Save Mode
- Power Supply Redundancy
- RS-232/485 Serial Interfaces
- Ethernet Interface
- Optional Built-In 1:1 Controller

Xicom Technology is proud to introduce our latest KPA product, the XTKH-3000C, a compact Klystron Power Amplifier (KPA) that occupies half the standard rack space and comes loaded with practical solutions and cost saving features.

Xicom's high efficiency series KPA features the latest in klystron technology, a Multi-Stage Depressed Collector (MSDC). The addition of the MSDC significantly reduces the prime power and dissipated thermal power of the amplifier. This not only reduces the annual utility costs, but also reduces the earth station's infrastructure cost for the AC power and uninterrupted power source.

A color touch-screen display, with an easy to use graphical interface that allows users to easily monitor all KPA parameters in both real-time and as a trend plot over short or long periods, is a standard feature

in Xicom's KPA design. Data is also available via an RS-232/485 interface and via an Ethernet port.

Included in the RF unit are a power save mode and variable speed blower. Xicom MSDC klystrons are available with optional digital fast-tuners that allow <1 second local or remote re-tuning.

Built-in power supply redundancy further optimizes reliability. The XTKH-3000C includes three 5kW-power supplies, any two of which will operate the amplifier normally. Xicom power supplies have been field-proven over hundreds of units.

Also, included is a built-in 1:1 redundant controller. Waveguide switch orientation is both graphically displayed and settable on the color digital panel, thereby eliminating the need for a separate controller. Remote switching is also available.

PERFORMANCE SPECIFICATIONS

Parameter	XTKH-3000C	XTKH-3000C1	XTKH-3000C2
FREQUENCY RANGE	5.85 - 6.425 GHz	5.85 - 6.675 GHz	6.70 - 7.05 GHz
OUTPUT POWER			
Klystron	3350 W	3350 W	3000 W
Rated Power @ Amplifier Flange	3000 W	3000 W	2600 W
PRESET CHANNELS	24	24	12
BANDWIDTH	45 MHz	45 MHz	40 MHz
GAIN			
at rated power		77 dB	
variation, max (at rated power)		0.40 dB Pk-Pk over $F_o \pm 13$ MHz	
slope, maximum (at rated power)		0.04/dB MHz over $F_o \pm 13$ MHz	
Stability, 24 Hr maximum		$\pm .25$ dB/24 hrs at constant drive/temperature	
Stability, Temperature		± 2.5 dB at constant drive	
GAIN ADJUSTMENT		0 - 30 dB, 0.1 dB Steps	
INTERMODULATION w/2 = signals		-29 dBc max at 7 db total output backoff	
HARMONIC OUTPUT, maximum		-80 dBc	
AM TO PM CONVERSION			
maximum		4.0°/dB at rated power	
NOISE POWER, maximum			
Transmit Band		-70 dBw/4 KHz	
Receive Band		-150 dBw/4 KHz (3.7 - 4.2 GHz)	
		-110 dBw/4 KHz (4.2 - 40.0 GHz) excludes passband	
GROUP DELAY, maximum			
Bandwidth		Any 36 MHz	
Linear		0.25 nS/MHz	
Parabolic		0.05 nS/MHz squared	
Ripple		2.0 nS/PK-PK	
RESIDUAL AM NOISE, maximum			
		-50 dBc up to 10 KHz	
		-20 (1.5 + Log f) dBc 10 to 500 KHz	
		-85 dBc above 500 KHz	
PHASE NOISE, maximum		10 dB below IESS-308 phase noise profile	
VSWR			
Input, maximum		1.2:1	
Output, maximum		1.25:1	
Load w/o damage		2.0:1	
Load, shutdown		> 2.0:1	

PRIME POWER

190-260 VAC, L-L, Delta
 50-60 Hz, Three Phase, Three Wire, Plus Ground
 10.5 kVA max
 .95 minimum power factor
 180% max in rush current



OPTIONS

330-450 VAC, L-L, Wye
 50-60 Hz, Three Phase, Four Wire + Ground
 Redundant 1:1 Configuration in One Cabinet
 Phase Combined & 1:N Configurations
 Fast Tuner (< 1 second)

ENVIRONMENT

NON-OPERATING TEMPERATURE RANGE
 OPERATING TEMPERATURE RANGE
 ALTITUDE

-50°C to +70°C
 -10°C to +40°C
 10,000 feet MSL maximum
 Derating (2°C/1000 ft)
 Normal Transportation
 95% Non-Condensing

SHOCK AND VIBRATION
 RELATIVE HUMIDITY

INTERFACE


TYPE AND MODE		FUNCTION	
CONTROLS	Local	AC Power ON	Emergency Stop Channel Selector
	Local and Remote	HV ON/OFF Attenuator Setting Units (Watts, dBm, dBw) Beam Voltage Adjust Fault Simulation Test RF Inhibit	Fault Reset Auto Power Save Heater Standby ON/OFF Min/Max Power Audio Alarm ON/OFF Switch Setting * Channel Selection (Optional)
STATUS		HV ON Standby Heater Standby Power Out Reflected Power Attenuator Setting Body Current Beam Current Heater Voltage Heater Current Heater Hours Beam Hours Blower Pressure Air Exhaust Temp Klystron Temperature Power Supply Temp Switch Setting *	Heater Time Out (FTD) Local/Remote Min/Max Power Beam Voltage Channel Selected (Optional) Faults: Summary High VSWR Body Current High/Low Voltage Air System Fault P.S. Temperature Low Line Waveguide Arc Interlock Power Supply A/B/C
	Dry Form-C Relay Contacts (Two)	Summary Fault	
COMPUTER SERIAL PORT RF SAMPLE PORT	Hardware Interface Xicom Command Set COUPLING	RS-232, RS-422/RS-485, Ethernet ASCII Commands -50 dB Nominal	

* For 1:1 systems



Klystron Power Amplifiers - High Efficiency Series



Block Diagram

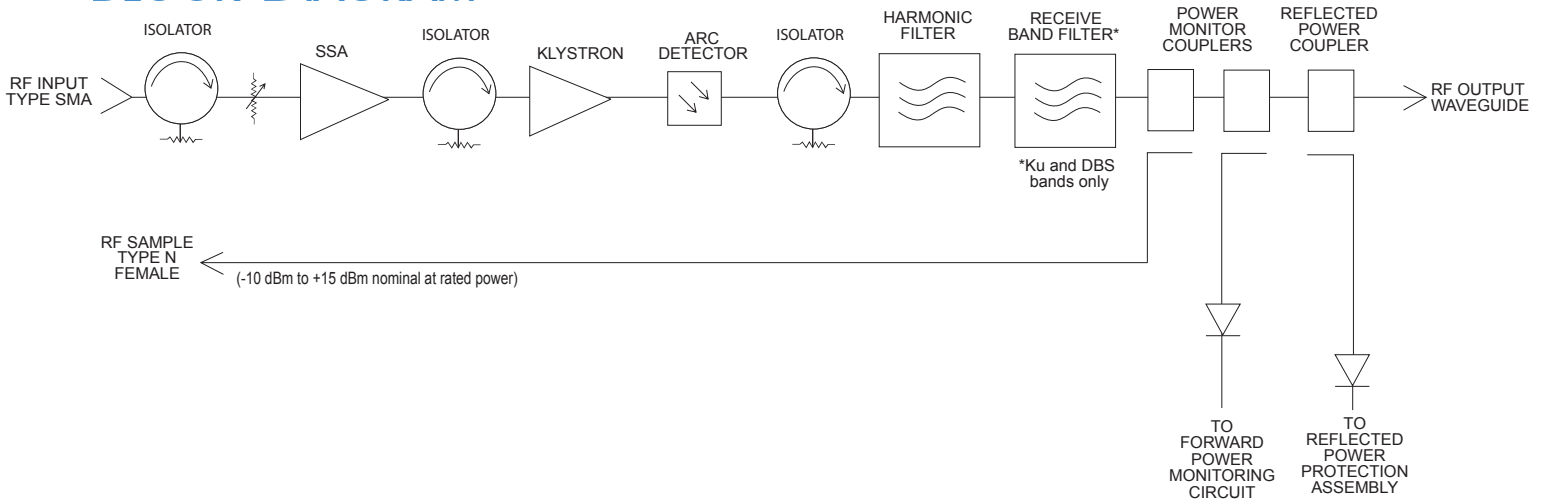

Outline Drawing

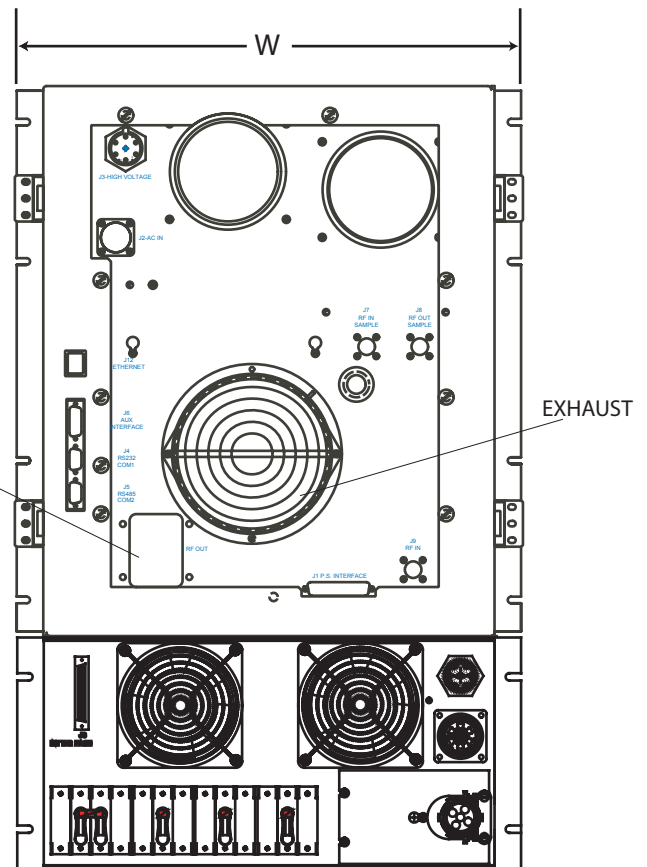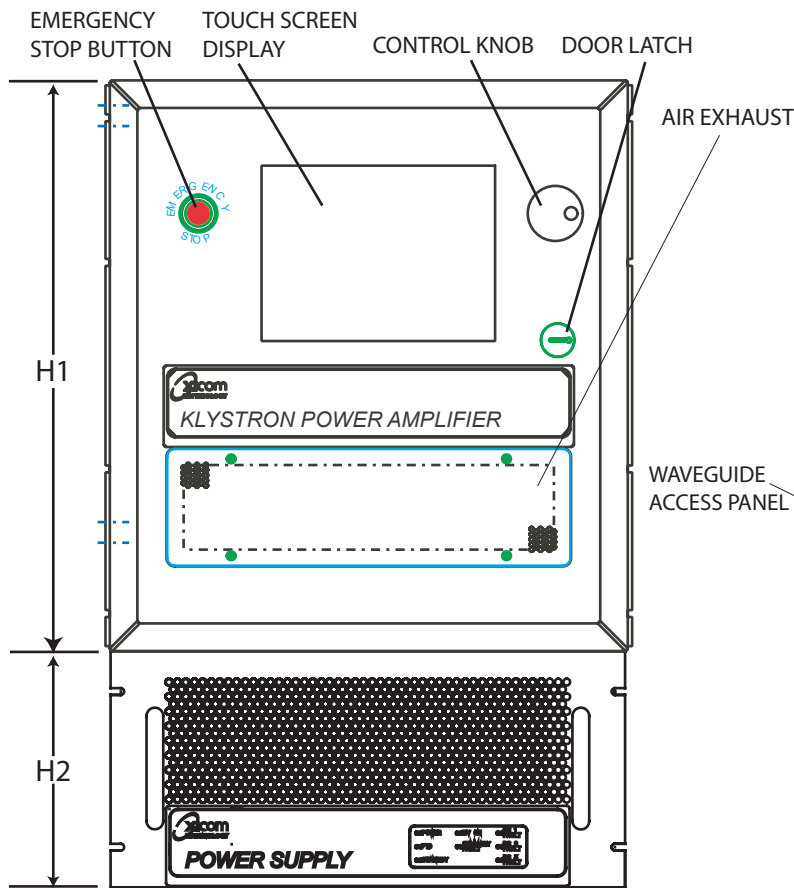

DIMENSIONS

	Inches	Centimeters
W	19.0	48.26
H1	21.0	53.34
H2	8.72	22.15
D	29.0	73.66

RF Output: WR-75

Nominal Weight = 300 lbs. (136.1 kg)



© Copyright 2002. 04/02/02
 Note: Technical specifications are subject to change without notice. Please contact Xicom Technology before using this information for system design.

3550 Bassett Street • Santa Clara, CA • 95054
 Tel: (408) 213-3000 • Fax: (408) 213-3001
www.xicomtech.com