



- **Compact 5¼ inch Package**
- **Digital Display & Control Interface**
- **High Efficiency**

The XTRD-80K is a highly efficient rack mountable traveling wave tube amplifier (TWTA) designed for test and measurement applications.

The unit includes RF gain control, a solid state pre-amplifier, cooling, and monitoring and control (M&C) systems.

Rack space is conserved because the amplifier occupies only 3 rack units (5¼ inches) of a standard 19 inch rack cabinet. Nominal weight is 36 pounds.

The unit features a menu driven front panel display and RS-232/422/485 serial port interfaces for complete computer control.

RF, traveling wave tube, and default parameters are easily monitored on the 4-line front panel display.

Gain control is provided via the front panel or through the serial interface.

Power factor correction circuitry is also included which minimizes line current distortion and reduces the required Volt-Amps input.

The automatic features of the high frequency resonant conversion power supply include quick recovery from prime power outages and multiple helix fault resets (three fault cycles.)

Depending upon user requirements, the amplifier can be configured for either single thread, redundant, or phase combined system operation.

PERFORMANCE SPECIFICATIONS

Parameter	XTRD-80K, Ku-Band
FREQUENCY RANGE, Standard Optional	14.0 to 14.5 GHz (13.75 to 14.5 GHz)
OUTPUT POWER Traveling Wave Tube Rated Power @ Amplifier Flange	80 Watts 70 Watts
GAIN Large Signal, minimum Small Signal, minimum Attenuator Range (continuous) Maximum SSG Variation Over: Any Narrow Band Full Band Slope, maximum Stability, 24 Hour maximum Stability, Temperature	70 dB 75 dB 25 dB 1.3 dB per 80 MHz 2.5dB ± 0.04 dB/MHz ± 0.25 dB ± 1.0 dB maximum over temperature range at any frequency
INTERMODULATION with two equal signals	-18 dBc maximum with two equal carriers at 4 dB total output backoff
HARMONIC OUTPUT, maximum	-60 dBc
AM/PM CONVERSION, maximum	2.5°/dB at 6 dB below rated power
NOISE POWER, maximum Transmit Band Receive Band	-70 dBw/4 kHz -150 dBW/4 kHz 10.95 to 12.75 GHz
GROUP DELAY, maximum Bandwidth Linear Parabolic Ripple	Any 80 MHz 0.01 nS/MHz 0.005 nS/MHz ² 0.5 nS/P _k -P _k
RESIDUAL AM NOISE, maximum	-50 dBc to 10 kHz -20 (1.5 + logf) dBc 10 to 500 kHz -85 dBc above 500 kHz
PHASE NOISE	10 dB below IESS phase noise profile AC fundamental -50 dBc Sum of all spurs -47 dBc
VSWR Input, maximum Output, maximum	1.3:1 1.3:1

PRIME POWER

100-260 VAC

47 to 63 Hz, single phase

Maximum VA: 525

0.95 Minimum Prime Power Factor

OPTIONS

Variable Phase Combined

Extended Frequency Coverage

1:1, 1:2, 1:N Redundancy



ENVIRONMENT

NONOPERATING TEMPERATURE RANGE

-50° C to +70° C

OPERATING TEMPERATURE RANGE

-10° C to +50° C

HUMIDITY

Up to 95% Noncondensing

ALTITUDE

10,000 feet MSL maximum

SHOCK AND VIBRATION

Normal Transportation

COOLING

Forced Air: 110 CFM


INTERFACE

	TYPE	FUNCTION			
CONTROLS	Local	Local/remote	AC Power ON/OFF		
	Local and Remote	Gain	Heater Standby ON/OFF	Fault Reset	
		Min/Max Power Alarm/Fault	Audio Alarm ON/OFF	Lamp Test	
		Reflected Power Alarm/Fault	Units (Watts, dBm, dBW)	High Voltage ON/OFF	
STATUS	Front Panel LEDs	Power	Heater Time Out (FTD)	Standby	
		High Voltage	Heater Standby	Local Mode	
		Remote Mode	Summary Fault		
	Front Panel Digital Display	Power Out	Attenuator Setting	Faults:	
		Reflected Power	Units Selection	High VSWR	
		TWT Temperature	Heater Hours	High Voltage	
		Helix Current	Helix Voltage	Helix Current	
	Beam Hours		TWT Temperature		
	Dry Form-C Relay Contacts (Two)	Summary Fault			
COMPUTER	Hardware Interface	2 ports: RS-232	RS-232/RS-422/RS-485		
SERIAL PORT	Xicom Command Set	ASCII Commands			
RF SAMPLE PORT COUPLING		-37 dB Nominal			


XTRD-80K High Power Amplifiers



Block Diagram

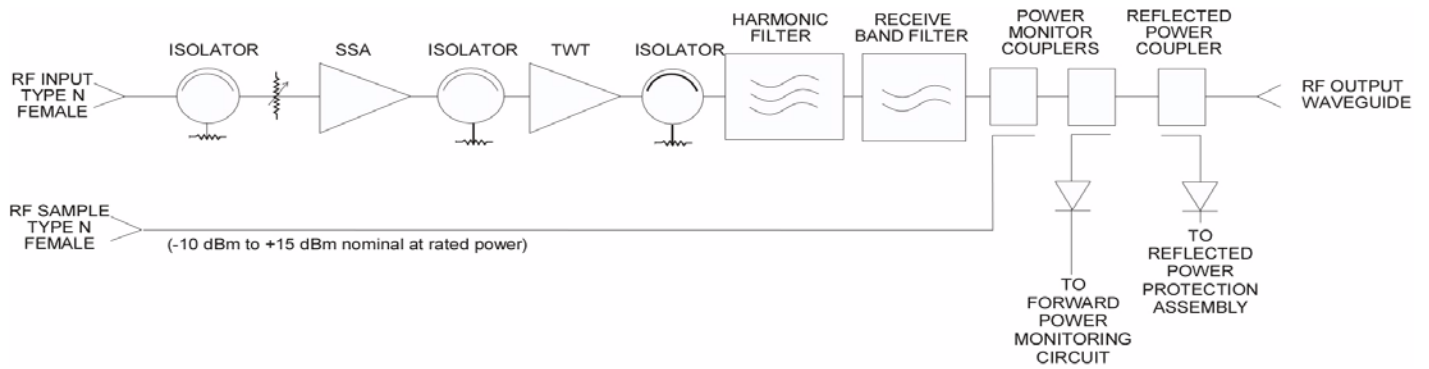

Outline Drawing

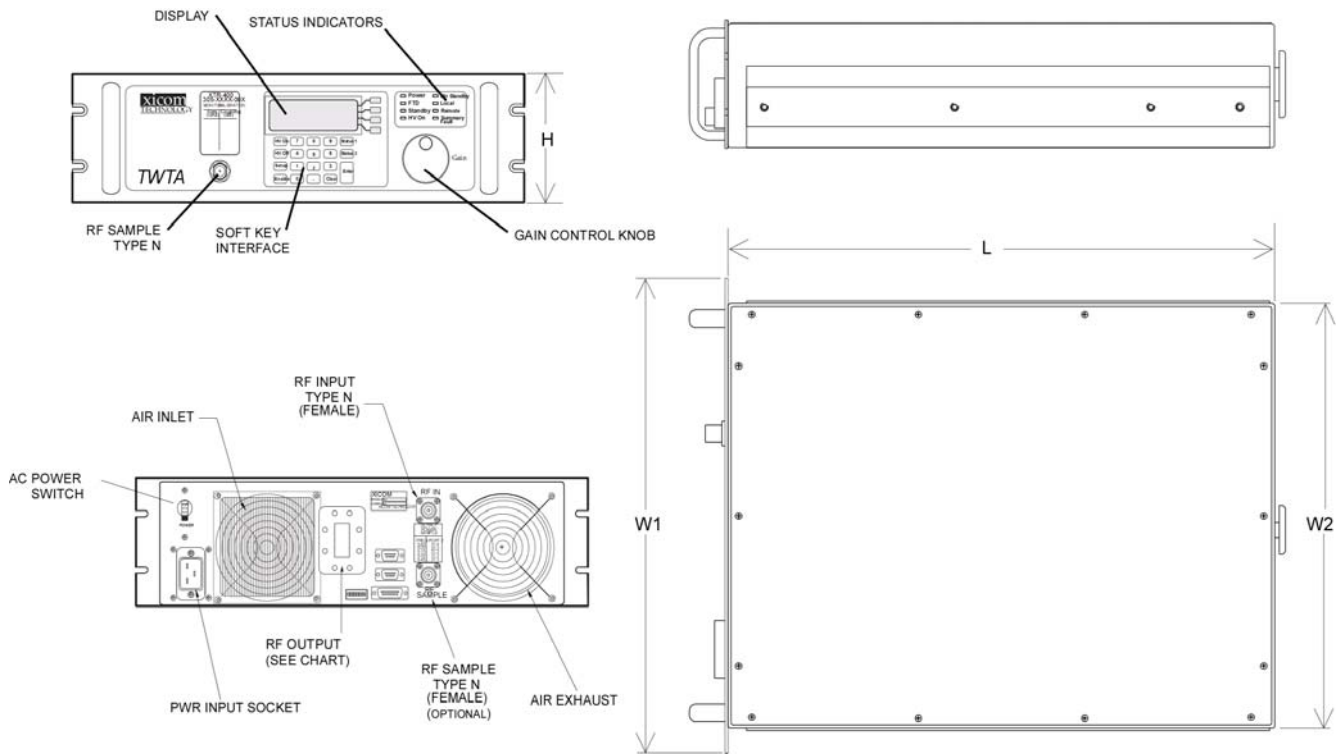

RF OUTPUT (WAVEGUIDE FLANGE)
Ku-BAND-WR-75

DIMENSIONS		
	inches	centimeters
W1	17.00	43.18
W2	19.00	48.26
L	23.00	58.42
H	5.22	13.26

Nominal Weight = 36 lbs (16.33 kg)



Document # 805-1414-001 06/22/2004
 XTRD-80K REV 1
 © 2004
 Note: Technical specifications are subject to change without notice. Please contact Xicom Technology before using this information for system design.

3550 Bassett Street • Santa Clara, CA • 95054
 Tel: (408) 213-3000 • Fax: (408) 213-3001
 www.xicomtech.com