



PROFESSIONAL MEDIA PRODUCTS

Light-Cross

Ultra-light remote head – only 4 lbs. (1,8 kg)

Build for the ambitious camera man, who wants to work with advanced technology. An extraordinary upgrade to our crane system LIGHT-FLEX JIB / 3.2 / 5.2.

Specifications:

Loadable up to 11 lbs (5kg)

- Made out of low torsion profiled air craft tubes with a deadweight of only 4 lbs (1,8 kg)
- No additional cables needed:
The LIGHT-CROSS is operating with an 4-pole XLR-cable. No additional cables needed for the video signal. Cause of the cable free slip ring connection system there is no interference to the free movement of the remote head. Endless turns in one direction are possible and there is no risk of breaking cables.
- Pre-installed 3 dimension axis (45 degrees step-less moveable to the left and to the right)
- Step-less controllable Pan/Tilt movement with joystick.
- Fast and easy setup.
- Clamp system. Holding fixture installed on all LIGHT-FLEX cranes.
- Power supply with XLR 4 plug or with power supply unit.
- Delivery with case.
- Extensible module system.

Technical data Light-Cross

- Digital control in 3 pre-selectable speeds for each axis
- Pan / Tilt step-less controllable with joystick
- Direction of Pan / Tilt and 3rd axis reversible
- Maximum speed Pan /Tilt 5 sec per turn
- Min speed Pan /Tilt 5 min per turn
- Weight 4 lbs (1,8 kg)
- Loadable up to 11 lbs (5 kg)
- Power supply with 4-pole XLR, plug AC 100-264 V, 45-60 Hz., DC 12V, 2A, 24W
- Dimensions of case 18,1 x 13,4 x 5,9 inch (46 x 34 x 15 cm)
- Weight of complete system incl. case 10 lbs (4,5 kg)

Package of delivery:


- Remote head LIGHT CROSS
- Control unit
- Case
- Power supply 100-264 V , AC voltage 45-60 Hz
- XLR cable 4 poles, 40 ft. (12 m)
- Operating manual

Options:

- Accumulator adapter NP 1
- Accumulator NP 1
- Activation 3rd dimension
- LANC-Control: Rec, Rec search + / - and zoom
- Monitor 5 or 7 inch
- Focus servo


low voltage plug for monitor

video out

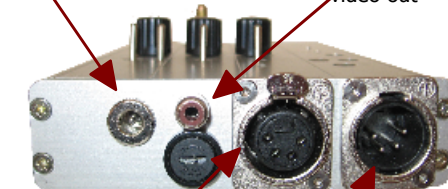

supply voltage XLR 4 pole plug

4 pole XLR cable routing to remote head

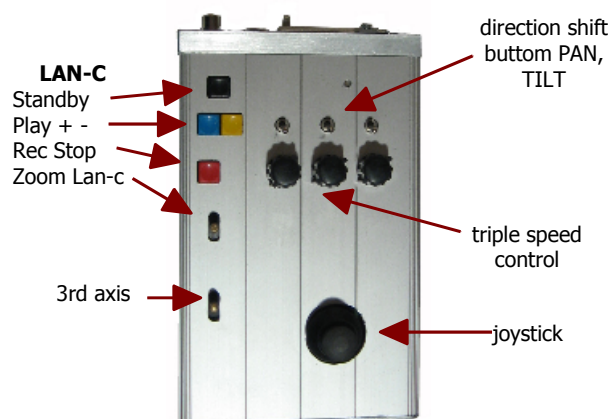

LAN-C


Standby
Play + -
Rec Stop
Zoom Lan-c

direction shift
bottom PAN,
TILT

triple speed
control

3rd axis

joystick

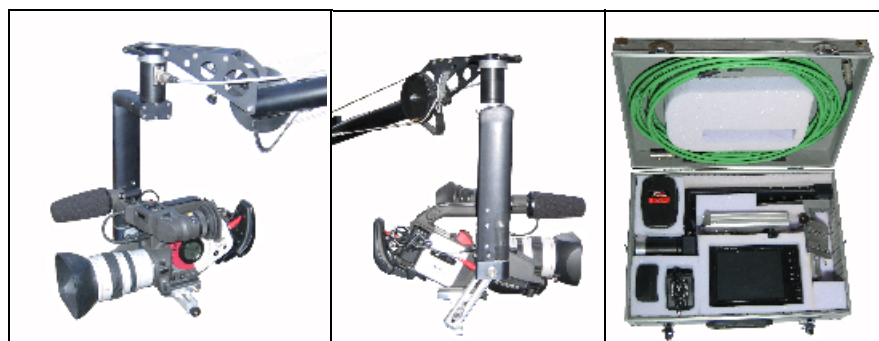

P-M-P Professional Media Products

Tel. 0043 (0) 664 2058 580
Fax 0043 (0) 5223 43 746
E-Mail: info@p-m-p.eu
Web: www.p-m-p.eu